


Specialized astro cameras

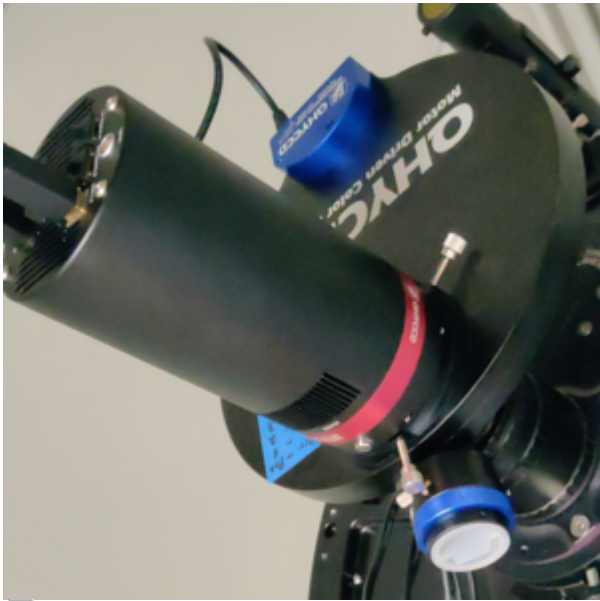

Our QHY 600M with the filter wheel

CMOS cameras

Our newcomer, the QHY 600M is a CMOS camera that was developed especially for astrophotography. It is our new deep-sky camera and offers among other things a full format sensor, a very high quantum efficiency, a very low readout noise and a very low dark current. For this camera we also have an off-axis-guide and a filter wheel with 9 positions.

CCD Cameras

Furthermore, four CCD cameras (ST-7, ST-8, STF-8300M, ST-i) from SBIG (*Santa Barbara Instrument Group*) and one CCD camera (Skyris 445C) from *Celestron* are available.

The ST-7 and ST-8 are deep-sky cameras, but due to their relatively small field of view they are rarely used. The STF-8300M is used as main camera for our two [Spektrographs](#).

The ST-i, the QHY 485C, and the Skyris 445C are “planetary cameras” which allow very short exposure times. They are mainly used for solar observations or as guiding cameras (see e.g. [here](#) or [here](#)) in connection with the QHY 600M and the spectrographs.

All cameras can be controlled via [Maxim DL](#). For the SBIG cameras [CCDOPS](#) is also available as control software. We have dedicated a separate article to the [assembly](#) of the cameras.

Basic data

Main cameras

	ST-7	ST-8	STF-8300	QHY 600M
Model number	ST-7XME-D	ST-8XME	STF-8300M	QHY 600M PRO-L
pixel size	9 μm x 9 μm	9 μm x 9 μm	5.4 μm x 5.4 μm	3.76 μm x 3.76 μm
Number of pixels	765 x 510	1530 x 1020	3326 x 2504	9576 x 6388
Total size of the chip	6.9 mm x 4.6 mm	13.8 mm x 9.2 mm	17.96 mm x 13.52 mm	36 mm x 24 mm
Field of view with the CDK20	6.9' x 4.6'	13.7' x 9.2'	17.9' x 13.5'	35.8' x 23.4'
Sampling	1.9 Pixel per arcsec	1.9 Pixel per arcsec	3.1 Pixel per arcsec	4.5 Pixel per arcsec

Planetary/Guiding cameras



Our SBIG ST-8

	Skyris 445	QHY 485C	ST-i
Model number	Skyris 445C	QHY-5-III-485C	ST-i monochrome
pixel size	3.75 μm x 3.75 μm	2,9 μm x 2,9 μm	7.4 μm x 7.4 μm
Number of pixels	1280 x 960	3864 x 2180	648 x 486
Total size of the chip	6.26 mm x 5.01 mm	11,2 mm x 6,3 mm	4.8 mm x 3.6 mm
Field of view with the CDK20	6.2' x 5.0'	11,2' x 6,3'	4.8' x 3.6'
Sampling	3.4 Pixel per arcsec	2,2 Pixel per arcsec	2.3 Pixel per arcsec

Filter wheels

QHY 600M

For the new QHY 600M we have installed the following filters in the filter wheel:

Filter position	1	2	3	4	5	6	7	8	9
Filter	H_alpha	OIII	SII	U	B	V	R	I	Clear
Comment	narrow band	narrow band	narrow band	broad band	broad band	broad band	broad band	broad band	

ST-7 & ST-8

A filter wheel with the following filters can be attached to the ST-7 and ST-8:

Filter position	1	2	3	4	5	6	7	8	9	10
Filter	U	B	V	R	I	H_beta	H_alpha	SII	OIII	EMPTY
Comment	broad band	broad band	broad band	broad band	broad band	narrow band	narrow band	narrow band	narrow band	

The transmission curves of the UBVRI filters can be found at the web page of *Baader Planetarium*: [Filter transmission](#). The transmission curves of the narrow band filter are similar to those of the STF8300.

STF-8300

For the STF-8300 a filter wheel with the following filters is available:

Filter position	1	2	3	4	5	6	7	8
Filter	Block-UV/IR (L)	Blue	Green	Red	H_alpha	OIII	V	B
Comment	luminance	broad band	broad band	broad band	narrow band	narrow band	broad band	broad band

The transmission curves of the new filters can be found at the web page of *Baader Planetarium*: [Filter transmission](#).

The transmission curves of the V and B filters are identical with the V and B filters used in the ST-7.

Features

- For the ST-7 and ST-8 we have an adaptive optics module, the AO-7, which can be used for guiding and to optimize the exposure quality (see e.g. [here](#)).
- The ST-7 and ST-8 contain an additional guiding chip in addition to the normal CCD chip, which can be used to automatically track an object (see e.g. [here](#)), while the main CCD can be used to take the actual image.
- The Off Axis Guides of the STF-8300 and the QHY 600M have the advantage that they are placed in front of the respective filter wheel and therefore the guiding is independent of the brightness of the guide star in the respective filter. For this reason, these cameras can make use of fainter guide stars/objects in comparison to the ST-7 and ST-8.

Maintenance


Every 12 months (or before) the desiccant cartouches of the cameras need to be regenerated (baked), otherwise there's the possibility that the cooled CCD sensors can suffer from icing due to moisture in the cameras. The desiccant cartouches of the ST-7 and ST-8 can be found at the bottom of the camera and can easily be released from the camera case with a screw driver. This procedure is even easier for the STF-8300, where the desiccant cartouche (located at one side of the camera) can be unscrew with two fingers. Attention! The connection between the camera cases and desiccant cartouches are secured by sealing rings that can easily fall off the cartouches and vanish inside the camera cases. To prevent water (vapor) from getting into the camera during the regeneration of its desiccant cartouche, remove the desiccant cartouche in a dry environment and replace it with one of the dummies, which can be found in the room 2.009. It takes about four hours at 170°C in a common oven (without the sealing ring!) to regenerate the desiccant in the cartouche, so that the camera can work for another year without icing.

DSLR

For short time exposures and lucky imaging there is the digital (single) reflex camera (DSLR): Canon EOS 700D. It has been optimized for amateur astronomers by *Baader Planetarium* by changing the used filters. The transmission properties of the original Canon filters in comparison to the optimized ones can be found at the Baader web page [click to view the image](#).

Basic data



 Our DSLR (Canon EOS 700D)

	EOS 700D
Image sensor	CMOS sensor
Size of the pixels	4.3 μm x 4.3 μm
Number of pixels	5,184 x 3,456

Total size of the chip	APS-C 22.3 mm x 14.9 mm
Format factor and Axe ratio	1.6 and 3:2
Field of view with the Celestron C14	19.6' x 13.1'
Field of view with the Celestron C11	27.4' x 18.3'
Field of view with the Celestron C11 + F/6.3 focal reducer	43.5' x 29.0'
Field of view with the Celestron C8	37.7' x 25.2'
Field of view with the Celestron C8 + F/6.3 focal reducer	59.9' x 40.0'
Exposure times	30-1/4,000 s (halves or thirds of steps)
ISO-Sensitivity	100-12,800 (can be expanded up to 25,600)

Furthermore, one can take full-HD videos with an ISO sensitivity of max. 6,400 (can be expanded up to 12,800). The camera can be controlled by a rotatable and slewable 7,7 cm LCD touchscreen or by a computer interface. Exposure series can be taken at a maximum speed of approx. 5 images per second, which can be maintained for about 22 exposures (JPEG format) or 6 exposures (RAW format).

It is also possible to remotely control the camera [by a computer](#).

From:
<https://polaris.astro.physik.uni-potsdam.de/wiki/> - OST Wiki

Permanent link:
<https://polaris.astro.physik.uni-potsdam.de/wiki/doku.php?id=en:ost:ccdsgrunddaten&rev=1656062196>

Last update: 2022/06/24 09:16

